

# Datasheet - LUL H20013

Doc.-no.: H20013-70-LUL\_Datasheet




## LINE UP LIGHT

- Ultra-flat design for obstacle-free flight deck operations
- Rigid build for high deck loads (of 325N/cm<sup>2</sup>)
- Light beam horizontal spread of 40° and 0-25 ° vertical elevation
- Customizable light sequence




## PRODUCT SPECIFICATION

Supply voltage	48 V DC
Power	3.3 W rated
Ambient temperature	-32 °C to 45 °C
Ingress protection level	IP66
Dimensions (D x H)	Ø 219 x 101 mm
Weight	1.8 kg
Colour	Aluminium grey
Surface coating	Anodized
Housing material	Seawater resistant aluminium alloy
Front glass material	Borosilicate glass
Luminous range	3 NM
Light source	LED
Light colours	White
Luminous intensity	488 cd
Shock	BV 0230 class B calculated 296G
Vibration	MIL-STD-810H
EMC	MIL-STD-461G

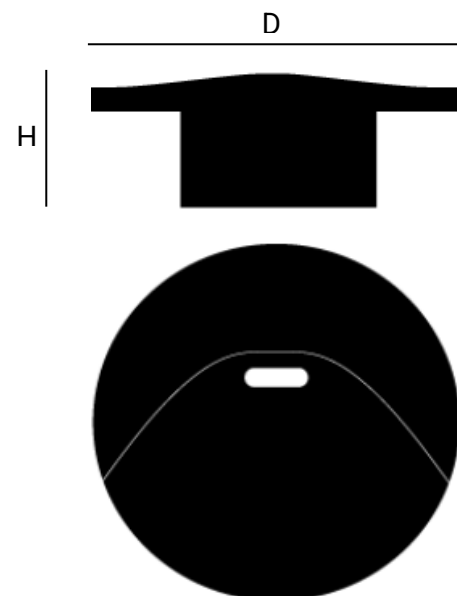

## APPLICATIONS

ON-Part No.	Cable Connector
H20013-00-001	Cable Gland (Wiska EMSK-V)



Horizontal  
FWHM



Vertical  
FWHM