


ADJUSTABLE DECK EDGE LIGHT - CONVEX

- Illumination of the perimeter on the flight deck
- Vertical adjustability for easy installation in various deck covers
- Allows readjustment after deck maintenance
- Array of sensors offers health monitoring*
- Dimmable in over 65 000 steps
- Designed for performance



PRODUCT SPECIFICATION

Supply voltage	48 V DC
Power	7 W
Ambient temperature	-25°C to 45°C
Ingress protection level	IP65
Dimensions (D x H)	Ø 108 x 90 mm
Weight	1.3 kg
Surface colour	Steel polished / aluminium grey
Surface coating	Polished / anodized
Housing material	Seawater resistant aluminium alloy
Top glass material	Soda lime glass
Top ring material	Stainless steel (polished)
Adjustment	9.5 - 55 mm top deck level to construction deck
Luminous range	3 NM
Light source	LED
Light colours*	Green, Amber, White
Luminous intensity*	Green: 63 cd; Amber: 25 cd; White: 150 cd

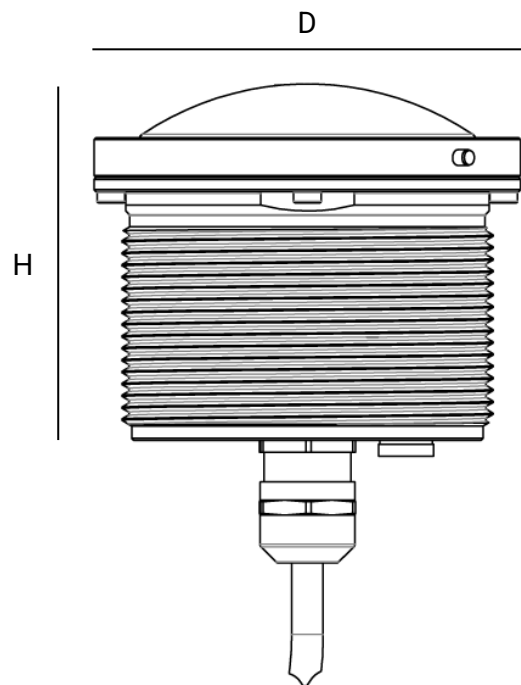

APPLICATIONS

ON-Part No.	Light Colour	Connector Gland
H20026-00-028	Green	Cable Gland (Wiska EMSK-V)
H20026-00-029	Green	M12 Connector
H20026-00-030	Green	Cable Gland (Wiska EMSK-V)
H20026-00-031	Green	M12 Connector
H20026-00-032	Amber	Cable Gland (Wiska EMSK-V)
H20026-00-033	Amber	M12 Connector
H20026-00-034	Amber	Cable Gland (Wiska EMSK-V)
H20026-00-035	Amber	M12 Connector
H20026-00-036	White	Cable Gland (Wiska EMSK-V)
H20026-00-037	White	M12 Connector
H20026-00-038	White	Cable Gland (Wiska EMSK-V)
H20026-00-039	White	M12 Connector



Horizontal
FWHM
360°



Vertical
FWHM
0°-20°; 90°

*Variant specific