

# Datasheet ADEL-V2-F H20026

Doc.-no.: H20026-70-ADEL-V2-F\_Datasheet



## ADJUSTABLE DECK EDGE LIGHT - FLUSH

Illumination of the perimeter, aiming circle or "H" on the flight deck

Deck even integration for an obstacle-free deck

Vertical adjustability for easy installation in various deck covers

Allows readjustment after deck maintenance

Provides light from abt. 20° (horizontal) upwards

Array of sensors offers health monitoring

Dimmable in over 65 000 steps

Designed for performance



## PRODUCT SPECIFICATION

Supply voltage 24 V to 48 V DC

Power\* 2 W, 4 W or 5 W

Ambient temperature -25°C to 45°C

Ingress protection level IP66/67

Dimensions (D x H) Ø 114 x 88 mm

Weight 1.54 kg

Surface colour Steel polished / aluminium grey

Surface coating Polished / anodized

Housing material Stainless steel

Mounting ring material Seawater resistant aluminium alloy

Top glass material Laminated safety glass

Top ring Surface Stainless steel (polished)

Adjustment 4 - 39 mm top deck level to construction deck


Luminous range 0.5 NM

Light source LED

Light colours\* Green; Amber; White

Luminous intensity 20 cd

Surface pressure 77,44 N/cm<sup>2</sup>

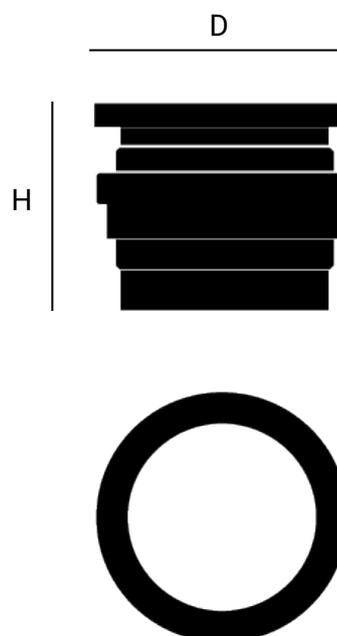

## APPLICATIONS

ON-Part No.	Light Colour	Power	Connector Gland
H20026-00-100	Green	2 W	Angled M12 Connector
H20026-00-101	White	5 W	Angled M12 Connector
H20026-00-102	Amber	4 W	Angled M12 Connector



Horizontal  
FWHM  
360°



Vertical  
FWHM  
Green: 100°  
Amber: 98°  
White: 110°

\*Variant specific