

Datasheet - PERL-R H20022

Doc.-no.: H20022-70-PERL-R_Datasheet




Perimeter Light - Retractable

- Designed to illuminate the landing deck area
- Almost deck even integration for an obstacle-free deck
- Provides light from 0° (horizontal) upwards
- Array of sensors offers health monitoring
- Dimmable in in over 65 000 steps
- Designed for performance



PRODUCT SPECIFICATION

Supply voltage	24 V DC
Power	15 W max
Ambient temperature	-20°C to 50°C
Ingress protection level	IP66/67
Dimensions	Retractable Light Unit: Ø 218 x 55 mm (D x H) Installation Pot: Ø 230 x 380 mm (D ₁ x H ₁)
Weight	Approx. 10 kg
Surface coating	Natural colour anodized (or customized)
Housing material	Seawater resistant aluminium alloy & seawater resistant stainless steel
Front glass material	Borosilicate glass
Top glass material	Laminated safety glass
Luminous range	3 NM
Light source	LED
Light colours	Green
Luminous intensity	0° - 20° > 30 cd & 20° - 90° > 3 cd
Operating pressure	6 bar / ISO 8573-1:2010 [7:4:4]

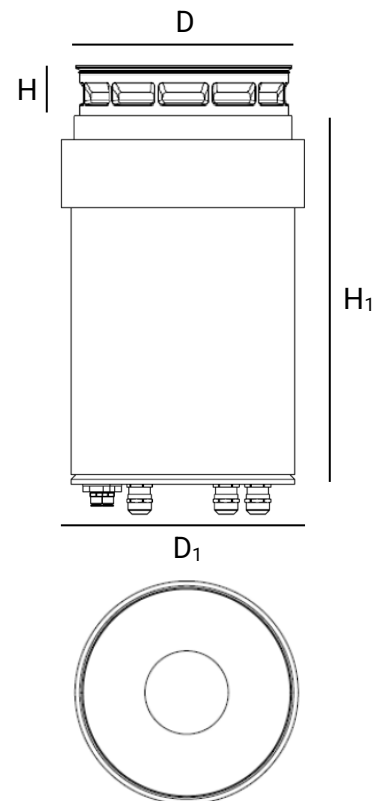

APPLICATIONS

ON-Part No.	Cable Connector
H20022-00-004	Cable Gland (Wiska EMSK-V)



Horizontal
FWHM
360°



Vertical
FWHM
0° - 20°
& 20° - 90°